


WING GATE OPERATOR

SCS300

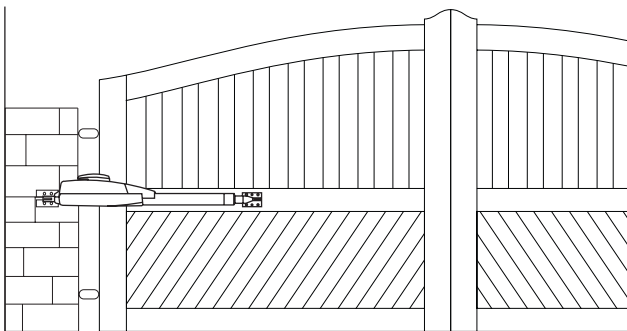


2-Year Full warranty
Install all equipment in compliance with EN60335-2-103.

High quality accessories included in the carton SCS300K | SCS300K-124 | SCS300K-120




* From Q III 2013, all LiftMaster Gate Operators will include the new 4-channel universal transmitter 433 MHz (TX4UNI). The TX4UNI universal transmitter can be used with any LiftMaster operator since 2003 which will enable you to operate all your LiftMaster Garage Door and Gate Operators with just one transmitter!

A=15 cm B=15 cm	= -90°	A			
		12 cm	14 cm	16 cm	18 cm
B	10 cm	115°	112°	110°	105°
	12 cm	110°	105°	101°	90°
	14 cm	108°	95°	90°	85°
	16 cm	106°	90°	85°	

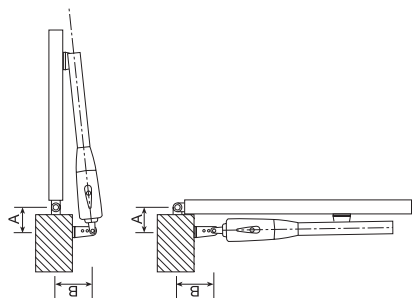

SCS300
SCS300-24

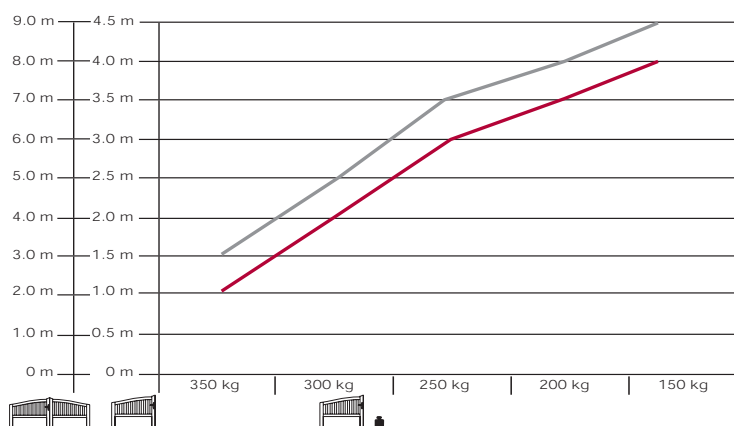

Optional accessories



772E Infrared safety sensor



FLA1-LED Flashing light kit

For more accessories please refer to the price book.

Technical Data

		SCS300	SCS300-24	SCS300-120
Voltage IN	V AC	220–240	220–240	127
Frequency	Hz	50	50	60
Motor voltage	V	230 AC	24 DC	127 AC
Power (nom.)	W	280	48	280
Current (max.)	A	1.2	2	2.4
Thrust (rated)	N	250	250	250
Capacitor	µF	6.3	–	25
Thermal overload protection	°C	140	–	140
Motor speed	rpm	1,400	2,400	1,400
Travel speed (arm)	mm/s	~20	~25	~20
Travel	mm	300	300	300
Duty cycle	cycles/h	~20	~70	~20
Working temperature range	°C	-20/+55	-20/+55	-20/+55
Protection class		I	I	I
Degree of protection	IP	44	44	44
Product weight (~)	kg	6.5	6.5	6.5

Model & carton content chart

Model	Drive unit	Install brackets	Hard stops	Capacitor	Elec-tronic control	Battery operation	Remote control 94335E	Receiver & radio 801221	IR sensor 772E	Flashing light FLA1-LED	Key switch COM18010	Antenna kit ANT4X-1LM	Number of cartons
SCS300	1 x	•	•	•									1
SCS300-24	1 x	•											1
SCS300K	2 x	•	•	•	•		2 x	433 MHz	•	optional	optional	optional	4
SCS300K-124	2 x	•			•	optional	2 x	433 MHz	•	optional	optional	optional	4
SCS300K-120	2 x	•	•	•	•		2 x	433 MHz	•	optional	optional	optional	4