



HOLLER ||||| **HOME**
ESSENTIAL

Stylish gates and fences for a secure home

Version 2024 (ed. 1)

Welcome to Home Essential: elegance and security for your home

Home Essential offers a wide range of gates and fences, all crafted to the highest quality standards, ensuring you find the perfect match for your home's architecture.

Whether you're looking for a modern, minimalist solution or a more classic style, Home Essential is here to meet your needs. Thanks to innovative technologies and durable materials, we guarantee products that can withstand both daily wear and tear and changing weather conditions.

Let Home Essential inspire you and discover how easy it can be to make your home both safe and stylish. We invite you to browse through our catalogue and discover the variety and quality of our products.

Brief Overview

- Motorised or not, Holler Home Essential has the perfect swing or sliding gate, along with a matching aluminium fence
- Individual customisation
- High-quality coating - no more painting required
- Choose from 7 standard colours, with a wide range of special colours also available
- Sustainable and environmentally friendly aluminium
- Plug & Play pre-assembly of all gate systems - making installation very easy
- Internal drive for maximum operational safety and accident prevention



Model Lyon

Vertical bars within the frame



Our Lyon model captivates with its modern and distinctive design. The varying distances between bars create a sense of visual dynamism, adding lightness and transparency to architectural spaces. This style is particularly suited to urban and contemporary designs that emphasize clean lines and minimalism. The Lyon model seamlessly integrates into outdoor environments, offering a stylish yet practical solution for property delineation and privacy. It perfectly balances visual appeal and functional design, enhancing any space it occupies.

Design within the frame



ST32



ST32 fine



ST65



ST110

Bar spacing approx. 80-100 mm Bar spacing approx. 30-40 mm Bar spacing approx. 30-60 mm Bar spacing approx. 30-80 mm



Characteristics

- Made of aluminium
- Various bar widths: 32, 65 and 110 mm
- Built into the frame
- Weather-resistant and low-maintenance
- Classic contemporary design
- Architectural solution

Comprehensive solution



Pedestrian gate



Manual and power-operated swing gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener



Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version



Fence

- Width: up to 2,000
- Height: up to 2,000 mm (with 100 mm ground clearance)

Model Basel

Horizontal slats outside the frame



The Basel model boasts an innovative design featuring horizontal slats of varying widths. Positioned outside the gate frame, these slats create a bold, modern aesthetic that adds an elegant visual effect while enhancing the minimalist character of the architecture. Perfectly suited for contemporary building projects, the Basel model aligns with designs that prioritize clean lines and exceptional style. It seamlessly blends aesthetic sophistication with practical functionality, offering a stylish solution for property demarcation and enhanced privacy.

Design outside the frame (continuous)



QL32A

Bar spacing approx. 30-40 mm



QL65A

Bar spacing approx. 30-60 mm



QL110A

Bar spacing approx. 30-80 mm



Characteristics

- Made of aluminium
- Various slat widths: 32, 65 and 110 mm
- Horizontal slat profiles built outside the frame
- Weather-resistant and low-maintenance
- Suits every architectural style
- Architectural solution

Comprehensive solution



Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)

Due to the method of construction, there are different horizontal profiles between gates and fence

Model Zurich

Horizontal slats within the frame



The Zurich model shares similarities with the Basel model but features horizontal slats integrated within the frame. This design choice lends the model a sleek, modern appearance while ensuring structural stability. The varying widths of the slats introduce a dynamic visual effect that seamlessly complements contemporary architecture. With its combination of minimalist design and practical functionality, the Zurich model is perfect for creating a stylish and effective property boundary.

Design within the frame



QL32i

Bar spacing approx. 30-40 mm



QL65i

Bar spacing approx. 30-60 mm



QL110i

Bar spacing approx. 30-80 mm



Characteristics

- Made of aluminium
- Various slat widths: 32, 65 and 110 mm
- Built into the frame
- Weather-resistant and low-maintenance
- A beautiful privacy screen in all variations

Comprehensive solution



Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)

Due to the method of construction, there are different horizontal profiles between gates and fence

Model Milan

Plain sheet metal outside the frame



The Milan model features a plain sheet metal infill positioned outside the frame, offering maximum opacity for enhanced privacy. This design ensures complete protection from prying eyes while maintaining a sleek, modern aesthetic. The Milan model combines functionality with understated elegance, making it an ideal fit for contemporary architectural concepts. It provides a clean, uninterrupted façade, perfect for those who prioritize both privacy and style.

Design outside the frame



B1-v

Inner side



Characteristics

- Made of aluminium
- Full sheets mounted on the frame
- Ideal as a privacy screen
- Weather-resistant and low-maintenance
- A modern, linear eye-catcher
- Architectural solution

Comprehensive solution



Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000
- Height: up to 2,000 mm (with 100 mm ground clearance)


Model Milan

Plain sheet metal within the frame



The Milan model features a plain sheet metal infill within the frame, creating a uniform and contemporary appearance. This design offers an elegant and functional solution, ensuring maximum privacy and protection from prying eyes. Seamlessly blending with contemporary architectural concepts, it emphasizes clean lines and minimalism. Combining aesthetic sophistication with practical functionality, the Milan model is the ideal choice for a stylish and screened exterior.

Design within the frame

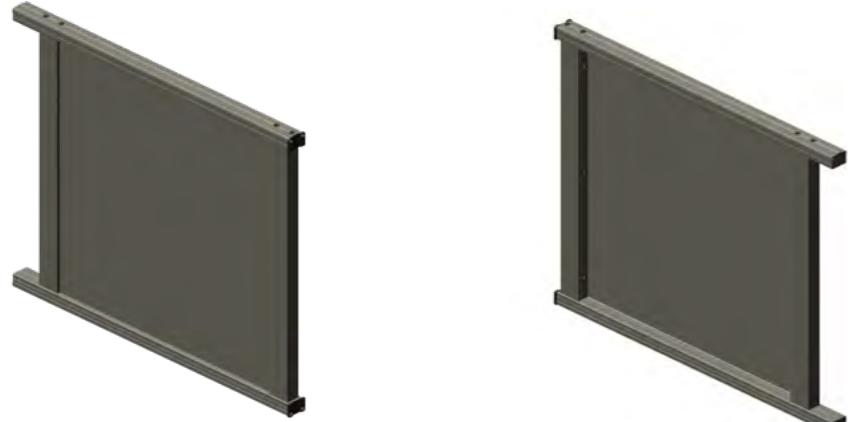

B1-i

Inner side



Characteristics

- Made of aluminium
- Full sheets within the frame
- Ideal as a privacy screen
- Weather-resistant and low-maintenance
- Classic contemporary design
- Architectural solution

Comprehensive solution



Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000
- Height: up to 2,000 mm (with 100 mm ground clearance)

Model Prague

Overlapping aluminium slats




The Prague model features horizontally arranged aluminium slats, positioned diagonally on top of each other. This opaque finish guarantees maximum privacy while offering a sleek, modern design. The slat arrangement creates a dynamic façade that seamlessly integrates with contemporary architecture. Combining elegance with functionality, the Prague model is the ideal choice for a stylish and secure property boundary.

Design



Comprehensive solution

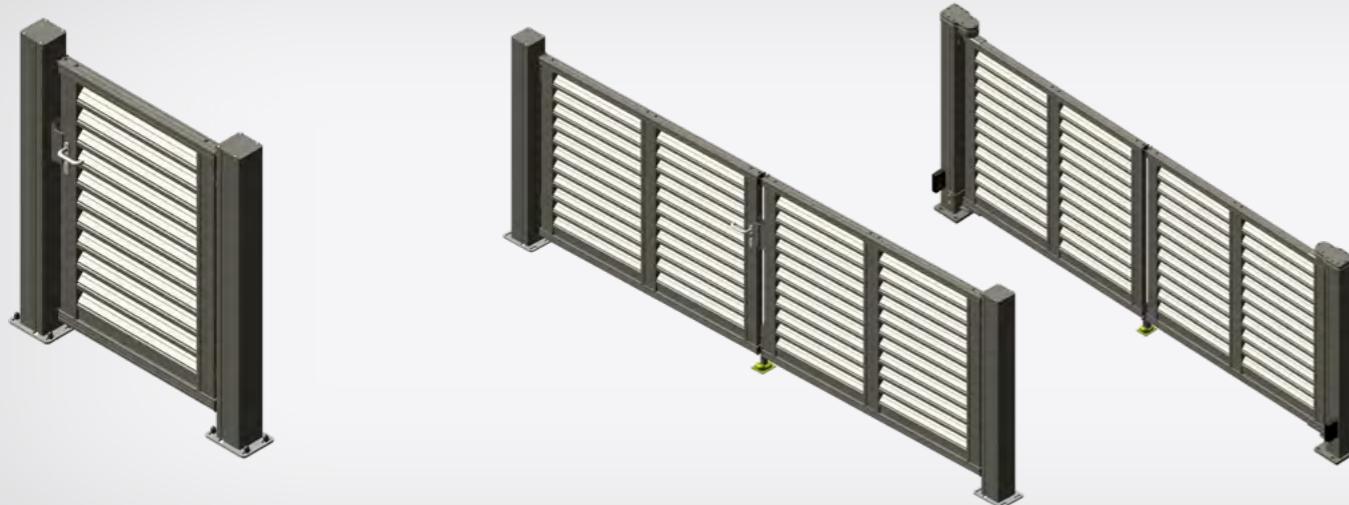

Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post



Characteristics

- Made of Aluminium
- Horizontal, slanted lamella profiles
- Inside the frame
- Weather-resistant and low-maintenance
- Privacy screen for more intimacy
- Architectural solution



Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)

Due to the method of construction, there are different horizontal profiles between gates and fence


Model Vienna

Extravagant modern design



The Vienna model features durable, interconnected 50 x 50 mm slats spaced approximately 50 mm apart. This design provides a modern, solid aesthetic that complements various architectural styles. Combining strength with visual appeal, the Vienna model is perfect for fencing properties in both a stylish and secure manner.

Design

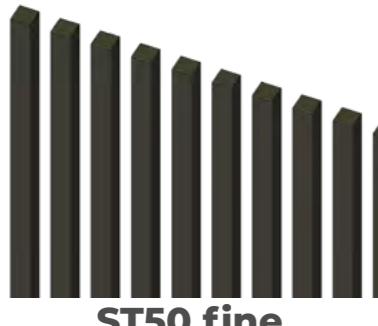

ST50 fine

Bar spacing approx.50 mm
Up to 1000 mm in height without connecting bar



ST50 fine



Bar spacing approx.50 mm
From 1000 mm height with connecting bar



Characteristics

- Made of aluminium
- Vertical aluminium profiles 50 x 50 mm
- With cover cap
- Weather-resistant and low-maintenance
- Classic contemporary design
- Architectural solution

Comprehensive solution

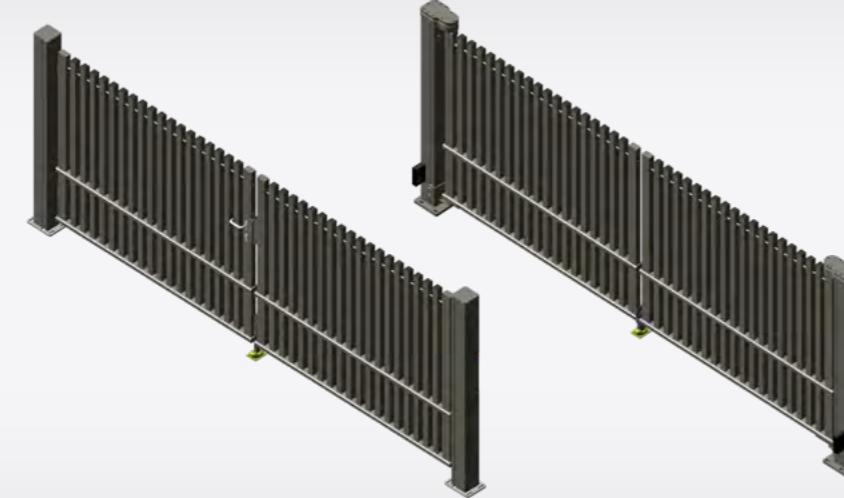

Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000
- Height: up to 2,000 mm (with 100 mm ground clearance)
- No post needed


Model Vienna

Stylish and creative design



The Vienna model features durable, interconnected 50 x 50 mm slats spaced approximately 100 mm apart. This design provides a modern, solid aesthetic that complements various architectural styles. Combining strength with visual appeal, the Vienna model is perfect for fencing properties in both a stylish and secure manner.

Design

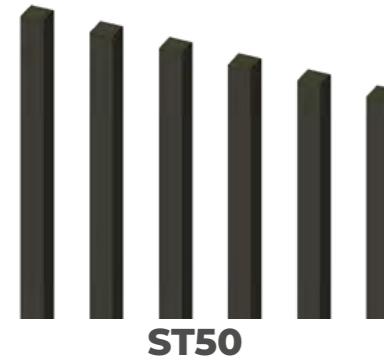

ST50

Bar spacing approx. 100 mm
Up to 1000 mm in height without connecting bar



ST50


Bar spacing approx. 100 mm
From 1000 mm height with connecting bar



Characteristics

- Made of aluminium
- Vertical aluminium profiles 50 x 50 mm
- With cover cap
- Weather-resistant and low-maintenance
- A linear, minimalist design
- Architectural solution

Comprehensive solution

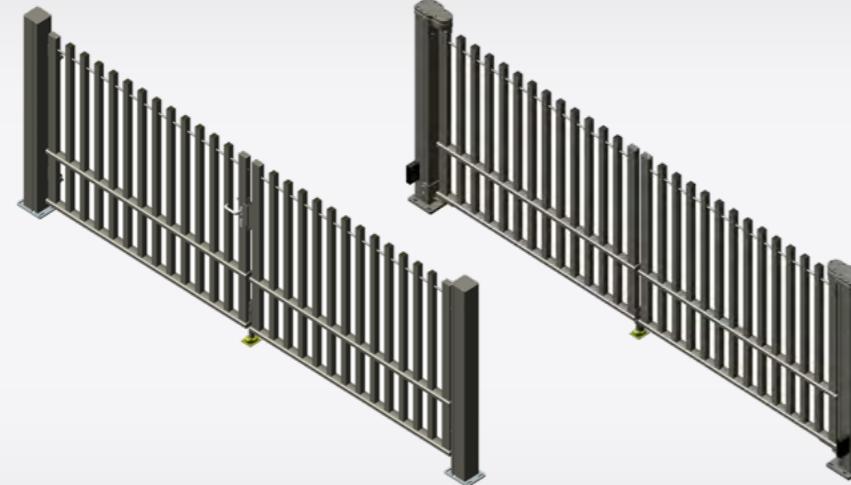

Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- Width: up to 2,000
- Height: up to 2,000 mm (with 100 mm ground clearance)
- No post needed

Model Rome

Eternal design in plain sheet metal



The Rome model combines modern design with cutting-edge technology. Thanks to the precise laser cutting process, the sheet metal design achieves a unique blend of elegance and functionality. The intricate laser-cut patterns give sliding gates, fences, and swing gates a distinctive appearance, seamlessly integrating with contemporary architectural concepts. The laser-cut panels are expertly installed within the frames, enhancing both form and function.

Design within the frame



LC Horizontal



LC Nature



Characteristics

- Made of aluminium
- Decorative laser-cut sheets
- Creative design
- Aluminium sheet - 2 mm thick
- Architectural solution

Comprehensive solution



Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version

Fence

- As standard panels up to 2,000 mm high and wide
- Design of the gates customised in individual production

Model Dresden

Industrial-style design



Our model Dresden has a robust yet elegant design that has been specially developed for demanding outdoor areas. The double welded mesh construction ensures maximum stability and security without compromising on aesthetics. The combination of sliding gates, fences and swing gates provides a complete solution that blends perfectly with modern architecture.

Design within the frame



DSM-I light

Double welded mesh mats with a dimension of 6/5/6 in the frame

Comprehensive solution



Pedestrian gate

- Width: up to 1,500 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Built-in lock with 3 keys and elegant handleset
- Optionally with electric gate opener

Manual and power-operated swing gate

- Single-leaf gates up to 3,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Double-leaf gates up to 5,000 mm wide and 2,000 mm high (with 100 mm ground clearance)
- Inwards and outwards opening direction possible
- Invisible drive unit in the drive post

Manual and power-operated sliding gate

- Width: up to 6,000 mm
- Height: up to 2,000 mm (with 100 mm ground clearance)
- Floor-guided or cantilever version
- Electric Plug & Play version





Powder Coat Finish



Our products are finished with a high-quality powder coating, applied in our own factory. With excellent weather resistance, easy maintenance, and scratch-resistant surfaces, they ensure lasting beauty and quality for many years.

- 7 beautiful standard colours are available
- Easy-care
- Scratch-proof
- Weather-resistant
- Low-maintenance
- Beauty for many years

Colour Chart



RAL 6005
Moss Green



RAL 7016
Anthracite Grey




RAL 9005
Jet Black



RAL 9006
White Aluminium



RAL 9007
Grey Aluminium



RAL 9010
Pure White



RAL 7030
Stone Grey

Other RAL colours are available
upon request.

Surface & Technique

HOLLER ||||| HOME
ESSENTIAL





Sliding Gate

Manually operated

- ▶ Track profile HST25A, 106 x 158 mm
- ▶ Frame construction: vertical profiles 80 x 50 mm
- ▶ Connected rolling mechanism
- ▶ Ball-bearing rollers, double roller guide in the top profile
- ▶ Guide and catch posts HST5 (150 x 150 mm) incl. dowel plates
- ▶ Powder coated
- ▶ Hook lock with 3 keys

Power-operated

- ▶ Plug & Play pre-assembled
- ▶ Track profile HST25A, 106 x 158 mm
- ▶ Frame construction: vertical profiles 80 x 50 mm
- ▶ Connected rolling mechanism
- ▶ Ball-bearing rollers, double roller guide in the top profile
- ▶ Guide and catch posts HST5 (150 x 150 mm) incl. dowel plates
- ▶ Powder coated
- ▶ Drive motor 24 V and control unit in the post
- ▶ Plastic toothed rack
- ▶ Security package consisting of 1 yellow flashing light, 2 safety photoelectric sensors, key switch, inactive safety contact edges on all secondary closing edges
- ▶ Emergency unlocking function to open the gate in the case of a power outage

Running gear

The sliding gate almost seems to 'float' silently on the low-maintenance track rollers. Eight ball-bearing support rollers and four ball-bearing cross rollers ensure smooth running and perfect weight distribution. The entire running gear is mounted on hot-dip galvanised dowel plates.



Profile technology

The static frame is made of high-strength extruded aluminium. Our profiles have been developed especially for these applications, they are positively locking and highly durable.



Upper guiding/ guide roller bracket

The low-maintenance ball bearings guarantee a trouble-free operation even in unfavourable weather conditions.




Swing Gate

Manually operated

- ▶ Frame construction: top and bottom profiles 66 x 62 mm and vertical profiles 80 x 50 mm
- ▶ 2x posts 150 x 150 mm for embedding in concrete
- ▶ Flush mount lock (1-leaf) or centre drop bolt (2-leaf) with 3 keys
- ▶ 1x or 2x hinge breakage protections
- ▶ Elegant stainless steel lever set

Power-operated

- ▶ Frame construction: top and bottom profiles 66 x 62 mm and vertical profiles 80 x 50 mm
- ▶ 2x system posts, profile 150 x 150 mm incl. dowel plate
- ▶ 1 or 2 drive units integrated in the post (H30K)
- ▶ Security package consisting of a yellow flashing light
- ▶ Emergency unlocking function to open the gate in the case of a power outage

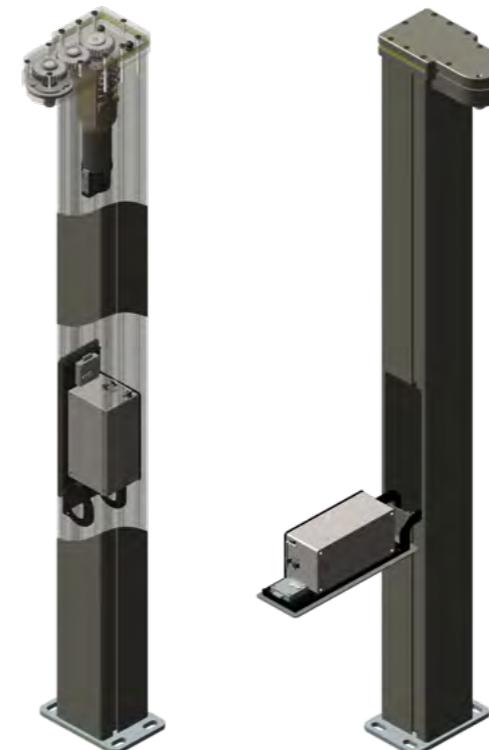

Motor drive for swing gate H30K

- ▶ Invisible integration in the drive post
- ▶ The gate leaf can be replaced independently of the drive unit
- ▶ Drive unit protected from dirt and weather influences in post (150 x 150 mm)
- ▶ Gear mechanism
- ▶ Post clearance width up to 3 m (for single-leaf swing gates) or 6 m (for double-leaf swing gates)
- ▶ Easy maintenance: technicians can easily access the drive unit without dismantling the gate
- ▶ Engine operating noise is extremely low

A wide range of electrical and mechanical accessories is available for you!

HOLLER



HOME ESSENTIAL



Your local partner

Holler Tore GmbH

Schlossallee 4
8435 WAGNA
AUSTRIA

Tel.: +43 3452 86031

mail@holler-tore.at
www.holler-tore.at

