

**ARTICULATED ARM**

# SWING GATE OPERATOR

**Basic Kit AA250EVK**


Maintenance-free 24 V operator for residential swing gates with wide posts with up to 2.5 meter wide each leaf. Modern design combined with powerful technology.



- 250 kg max. door leaf weight per wing
- 2.5 m max. door leaf width per wing
- 120° max. door opening

**Popular features**

- SMART HOME - myQ compatible operation via smartphone enabled
- Reliable 24V DC motor
- Easy setup and programming
- 3 band multi-frequency radio
- Low standby consumption
- Optional backup battery\*

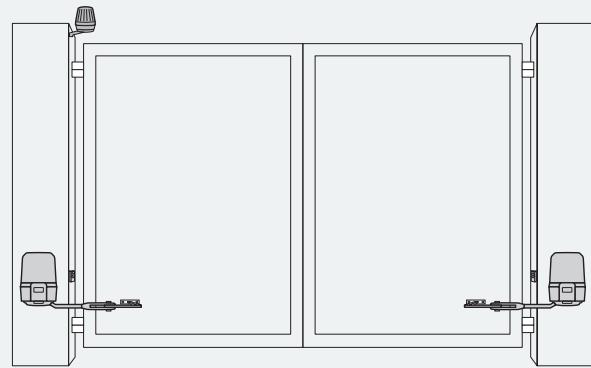

Application: Swing gate with wide pillars (see page 2)

**Content basic kit AA250EVK**

- 2x 24 V swing gate operator
- 2x articulated arms
- 2x 4-channel 868 MHz remote control (TX4EVF)
- 1x control board (built-in) factory preset to required application type. Incl. transformer and built-in radio module

**Extended kits**

Content	Kit no.
Basic kit + infrared photocells (772E-01)	AA250EVK-01
Basic kit + flashing light (FLA1LED)	AA250EVK-02
Basic kit + infrared photocells (772E-01) + flashing light (FLA1LED)	AA250EVK-03

Please visit [liftmaster.eu](http://liftmaster.eu) for full contents list.

\* Limited functionality in battery back-up operation

**myQ Smart home technology**

Monitor and control your drive way gate and LiftMaster EV garage door or myQ LED from anywhere. Get real time notifications, set schedules and share the app with up to five family members and friends.

Never wonder if your gate is left open again.

**Required accessories for myQ operation**

- Internet gateway (828EV)
- Infrared photocells (772E-01)



Available on the  
App Store

ANDROID APP ON  
Google play



## Technical specification

Input voltage/frequency	220-240 V AC / 50/60 Hz	Standby consumption	3.2 W
Motor voltage	24 V DC	Limit switch system	Hardstops
Torque/pull force	200 Nm	Working temperature	-20°C to +55°C
Max. wing width/weight	1.5 m/250 kg, 2.0 m/200 kg, 2.5 m/150 kg	Ingress protection	IP 44
Max. opening angle	120°	Radio frequency	868 MHz range, 433 MHz range, myQ
Max. cycles per hour/day	10/30	Code	Security+ 2.0
Time to open to 90°	<13-15 s	Homelink	Compatible

## Functions

Smartphone control (myQ)*	Enabled
Battery backup**	With optional battery kit (490EV) (2 x 12V lead acid batteries)
Control board	Built-in
Max. nr. of remotes	180 remotes

### Control board functions and connectors:

Automatic force learning, automatic force reversal, soft start/soft stop, force adjustment, speed adjustment, partial opening, timer to close, integrated radio module, 24VDC accessory output, flashing lamp, external input (max. 3), e-lock, magnetic lock, safety edge (8.2 K), external relay, IR's (max. 3), LED display for programming, password protection, maintenance counter.

## Connectable accessories


myQ Accessories	myQ gateway (828EV)
Radio Accessories 433 MHz	4 channel transmitter (TX4UNIS), 4 channel transmitter (TX4UNIF), two button wireless wall control for internal use only (128EV), wireless keypad (747EV, 850EV, 780EV)
Radio Accessories 868 MHz	4 channel transmitter (041ATX4EVF), 4 channel transmitter (TX4EVS)
Safety Accessories	IR (772E-01), flashing light (FLA1-LED), 8.2 KOHM safety edge, 2 x 12V lead acid batteries (490EV)
Other Accessories	Key switch (flush mounting 100034, surface mounting 100041), hardstop (low 203315, high 203322), E-Lock 24V (600024), mechanical locking for double swing gates (203339), antenna kit (SWG-ANT-EV)

\*Requires usage of a myQ gateway and a presence detecting device (IRs)


\*\* Limited functionality in battery back-up operation

## Dimensions

CE UK CA

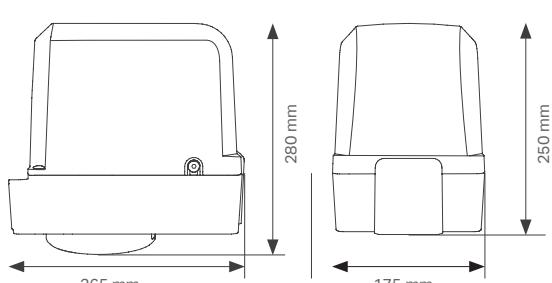

	A	B	C
Opening angle mm			
90°	150-300	390-540	0-200
120°	300-350	300-350	0-25

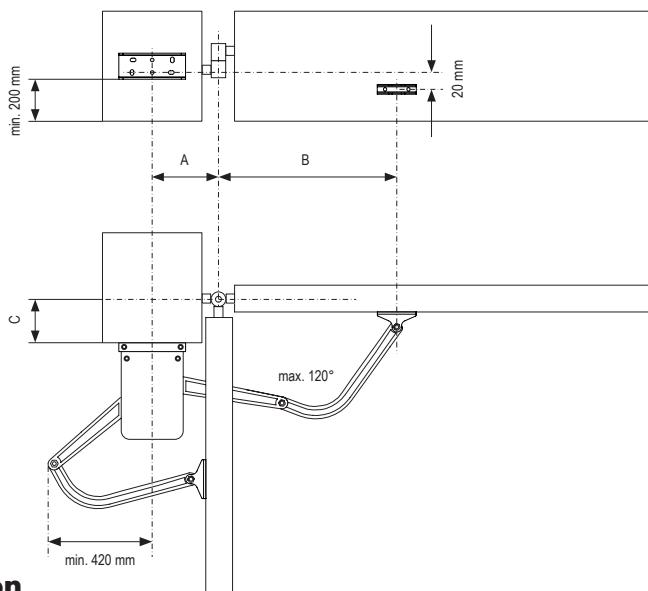

## For purchase and professional installation

LiftMaster.eu

### For partners

Contact your LiftMaster Representative

Phone Support: 0049 681 870 80 172 | E-Mail: [info@chamberlain.com](mailto:info@chamberlain.com)

© 2021 Chamberlain GmbH, All Rights Reserved. | LMSSAA250EVK01 6/21 | Misprints, errors and technical changes reserved.

LiftMaster, the LiftMaster logo, myQ, the myQ logo and Chamberlain are registered trademarks of The Chamberlain Group, Inc. HomeLink® is a trademark of Gentex Corporation | Chamberlain GmbH, Saar-Lor-Lux-Str. 19, D-66115 Saarbruecken