



# LBA GRILLE GTH FLEX

Secure access to your site with the **articulated full-height gate**. Thanks to its soft, flexible bars, the gate springs back into position when struck by a vehicle.

Available on : LBA 6, LBA 7, LBA 86 and LBA 12.


Length up to 7.5 m.

## FULL-HEIGHT GRILLE RIGID GRID - FLEXIBLE BARS DETERRENT ASPECT - LOW MAINTENANCE



Extended upper  
grill on shaft

Length: up to 7.5 m

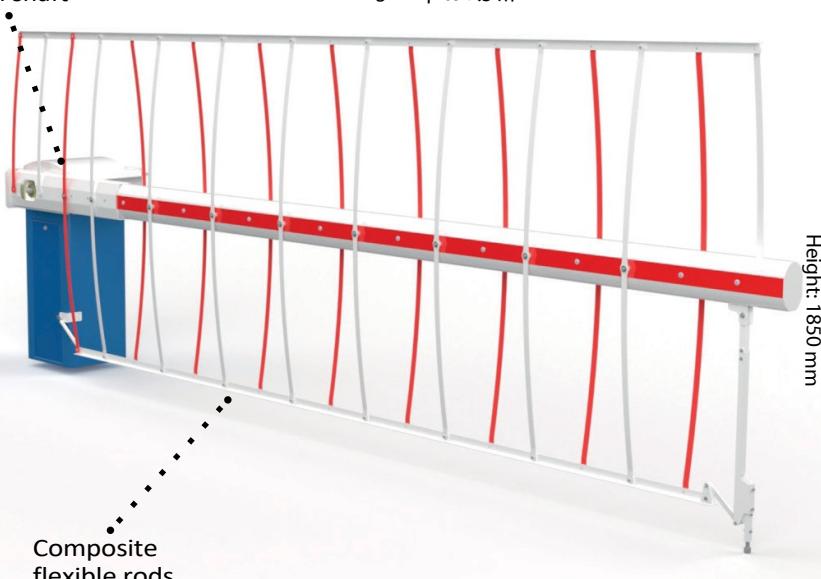

ALL-HEIGHT SAFETY  
Replaces a gate



HIGH IMPACT RESISTANCE  
Rigid gate and flexible bars. Return to position when struck by a vehicle.



LIMITED MAINTENANCE  
Less breakage due to vehicle impacts.



ESTHETICS  
Guided hinge with grid retraction against rail



GTH FLEX+ BARREL  
ROTATION  
Less breakage, rail protected by barrier rotation.



# LBA GRILLE GTH FLEX



## MAIN FEATURES

- Full-height gate with aluminium rail from 2 to 7.5 m and "flex" bars every 25 cm
- Intensive operation
- Class 2 reflector strips (optional)
- Guided hinge with recess against the rail on both sides
- Polyester-reinforced fiberglass rungs



## TECHNICAL DATA

- Side rail with red reflector strip :
  - 84 x 57 mm - LBA 6 and 7 (up to 4.60 m)
  - 135 x 93 mm- LBA 86 (up to 6.60 m)
  - 180 x 118 mm - LBA 12 and 86 (up to 7.5 m)
- With extended top grille on gate shaft
- Aluminium dish 25 x 3 mm
- Always installed with a stand or kickstand

Rods	25 x 6 mm x 765 mm
Max. length	7,5 m
Height	1850 mm
Paint	Polyester powder baked at 250°. White and red lacquered RAL 9010 and RAL 3020

